

# Removable bollards RM

with base


RM275/K4-900 / RM275/M30-1200



Product description		
	275/K4RM-900	275/M30RM-1200
Removable cylinder	Height	900 mm
	Diameter	273 mm
	Material thickness	10 mm
	Material	Steel S355JR Stainless steel (AISI 304)/(AISI 316)
	Cylinder weight	92 kg
	Surface treatment	Steel version: anti-corrosion treatment – standard painting* Stainless steel version: standard painting* or brushed
	Reflecting strips (height 55 mm)	Yes
Impact energy without destruction - impact resistance	100,000 J	
Impact energy with destruction - breakout resistance	750,000 J	
Security lock	Yes – profile half cylinder lock incl. 2 keys	
Certified acc. to	PAS68, IWA14-1, ASTM M30	
Conforming with	PAS68, IWA14-1, M30	
Load rating acc. to EN 124		

\* For orders with no surcharge in RAL to choose, the standard colour is Anthracite grey.

**// NEW**  
Shallow foundation  
version available

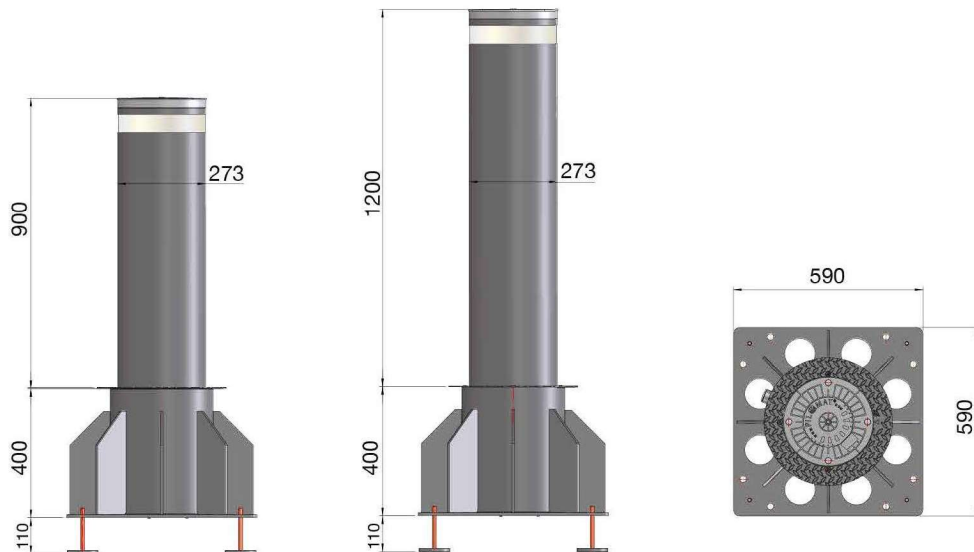

# Removable bollards RM

with base

RM275/K4-900 / RM275/M30-1200



RM275/K4-900/ RM275/M30-1200 with flat ground fitting		RM275/K4-900	RM275/M30-1200
		Article no.	Article no.
Removable bollard RM275/ K4-900 / RM275/M30-1200 + Includes 2 key lock with profile half cylinder	Steel painted	PQ301092	PQ301022
	Stainless steel painted	PQ307092	PQ307022
	Stainless steel brushed	PQ313092	PQ313022
Removable bollard RM275/ K4RM-900 / RM275/M30-1200 + Lock with profile half cylinder, including 2 keys + Lighting strips with 25 LEDs *	Steel painted	PQ301093	PQ301023
	Stainless steel painted	PQ307093	PQ307023
	Stainless steel brushed	PQ313093	PQ313023
Ground fitting for without LED made of painted steel, with round bottom plate			AA105791
Ground fitting for with LED made of painted steel, with round bottom plate			AA106171
Surcharge to have the same lock and keys for more bollards		Surcharge per bollard	AA107761
* For removable bollards with LED lighting strips, an additional cylinder cover (head) for base (article no. AA106921) must also be ordered.			
Optional extras for removable bollards		Article no.	
Surcharge for painting the cylinder in RAL to choose		AA900741	
Surcharge for cylinder version in stainless steel brushed (AISI 316)	Cylinder 275-900	AA104071	
	Cylinder 275-1200	AA104101	
Protection against corrosion - marine treatment - for ground fitting (recommended for saline ambient conditions)		AA107971	
Protection against corrosion - marine treatment - for removable bollards (recommended for saline ambient conditions)	RM275/K4-900	AA104081	
	RM275/M30-1200	AA101841	
LED lighting strip power supply for semi-automatic / fixed bollards (max. 8)		AA107341	
LED lighting strips line extension (80 m max.), supplied in 5 m increments		Per m	AA107551
Cylinder cover (head) and reflecting strip (no logo)		difference	AA108811
Additional cylinder cover (head) for base		AA106921	
Rectangular bottom plate, steel		AA105801	
Rectangular bottom plate, stainless steel		AA108041	
Additional key for removable bollard		AA107751	
Kit to modify the bollard 275 K4/M30/K12/M50 for inclined road		AA108151	
Project inclination required (if not available)		AA108161	
<b>//NEW Shallow foundation version</b>			